




Concealed ZEMS6153AV Model Hardwired Sensor Flush Valve for Water Closets

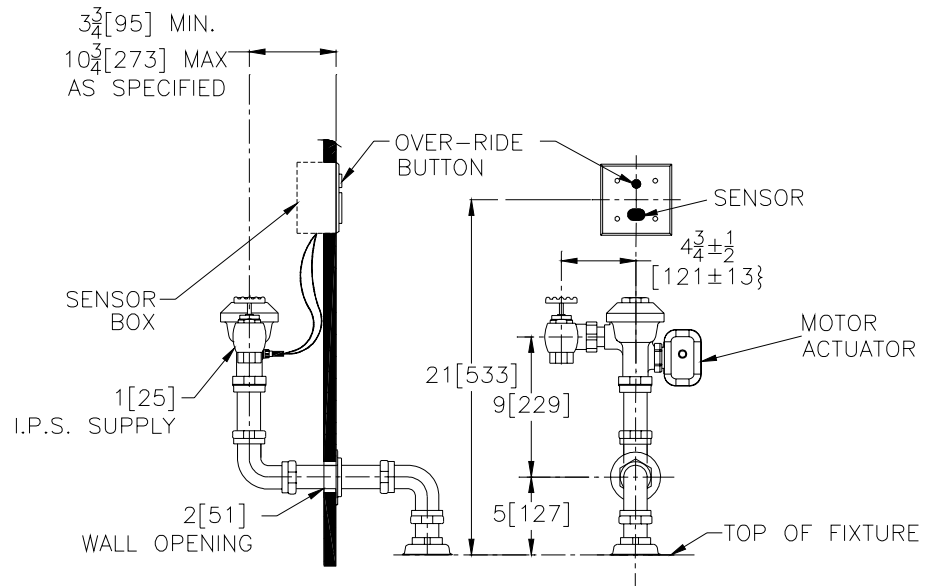

Flow Options

- WS1 1.6 Gal. Low Consumption
- FF 4.5 Gal. Full Flush
- Standard Flush 3.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

- _____ -BB Battery Back-up
- _____ -HP6 120VAC/6VDC Hardwired Power Converter
- _____ -MJ Mini Junction Box
- _____ -PC6 120VAC/6VDC Plug-In Power Converter
- _____ Other

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

ENGINEERING SPECIFICATION: ZURN ZEMS6153AV AquaSense® Concealed Hardwired Automatic Sensor Flush Valve For Water Closets- Concealed, quiet diaphragm-type, rough brass, flushometer valve with Zurn's AquaVantage TPE, chloramine resistant, dual seal diaphragm with surface optimization and a clog resistant dynamic orifice. The valve incorporates a 6 VDC motorized actuator, an automatic sensor with a manual push-button override, high back pressure vacuum breaker, hex coupling nut and adjustable tailpiece, spud coupling and flange for top spud connection. Switchable sensor features include: courtesy flush, automatic 24 hour flush, and diagnostic indicator lights. Control stop has internal siphon-guard protection, and a sweat solder kit. Internal seals are made of chloramine resistant materials. Electrical box by others (see installation instructions for type and style). Note: Order power converter separate, one power converter operates up to eight valves.

This space is for Architectural/engineering Approval