




ZEMS6200PEV-IS

Hardwired Automatic Sensor Flush Valve For Water Closets

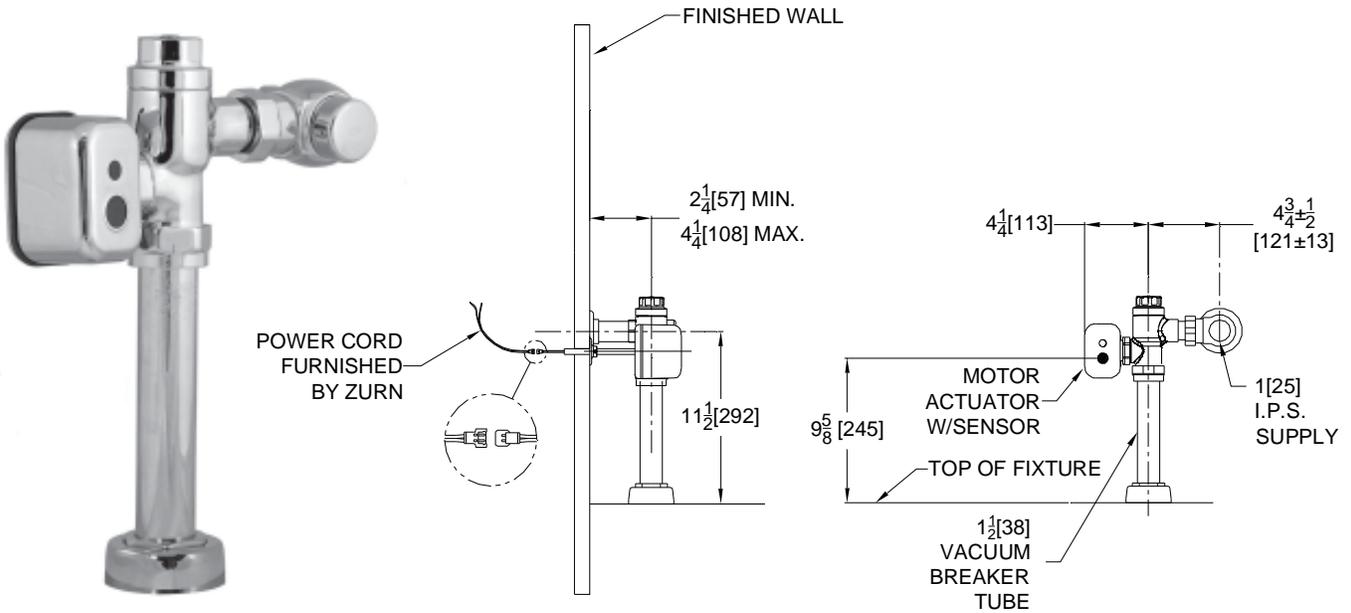

Flow Options

- Standard Flush 1.28 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

- _____ -YJ Split Ring Pipe Support
- _____ -YK Solid Ring Pipe Support
- _____ -YO Bumper On Angle Stop
- _____ Other

Accessories (Order separate as specified)

- PESS6000-BB** Battery Back-up (Up to 8 valves)
- P6000-PC6** 6VDC Plug-in Power Converter (Up to 8 valves)
- P6000-MJ** Mini Junction Box
- P6000-HW6** Hardwire Power Converter (Up to 8 valves)

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

NOTE: Performance guaranteed with Zurn Ecovantage fixtures. Please consult Zurn Technical Services at 1-800-997-3876 to discuss the paired performance of this valve with other manufacturers fixtures.

ENGINEERING SPECIFICATION: ZURN ZEMS6200PEV-IS EcoVantage Piston Operated Exposed Hardwired AquaSense® Closet Flush Valve -

The EcoVantage valve is an exposed, quiet piston type with self cleaning by-pass, chrome plated flushometer valve with a polished exterior. The valve is ADA compliant and incorporates a 6 VDC motorized actuator, an integral infrared convergence-type proximity sensor and a manual push-button override into an all-metal, polished chrome plated housing. Sensor range automatically adjusts to its environment at power up and is powered by a 6 VDC power converter. Complete with high back pressure vacuum breaker, one piece hex coupling nut, adjustable tail-piece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection and a wall flange with set screw. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval