


4" CENTERSET GOOSENECK

Z812A1-TWM

TAG	

Engineering Specifications: Zurn AquaSpec® Z812A1-TWM

Polished chrome-plated cast brass wall mounted faucet body with integral shanks, quarter turn ceramic disc cartridges and a 3-1/2" [89mm] centerline rigid or swing gooseneck spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 2-1/2" [64mm] vandal-resistant color-coded metal lever handles and mounting hardware.

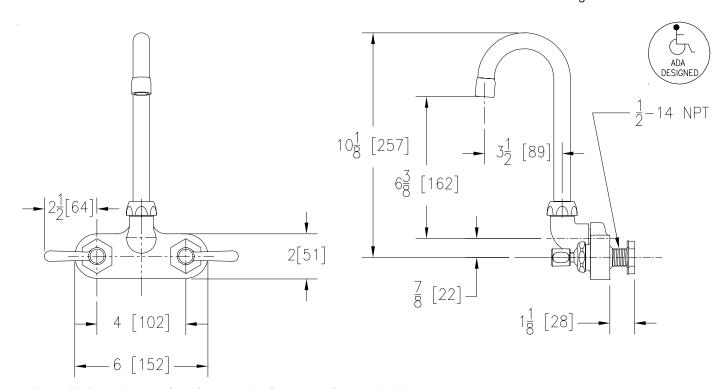

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Suffix Description	
	·	
FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout	
G	1-1/4" [32mm] Grid Strainer Drain	
GH	1-1/4" [32mm] Offset Handicap Grid Drain	
HCT	Hot/Cold Text Indexes	
140	Restricted 140° Swing Spout	
2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator	
3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Aerator	
4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow	
5F	2.0 GPM [7.6L] Female Spray Outlet	
7F	1.0 GPM [3.8 L] Pressure Compensating Female Spray Outlet	
16F	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Female Spray Outlet	
17F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Aerator	
18F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Laminar Flow	

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292